

Specification

Cells Per Unit	3
Voltage Per Unit	6
Capacity	335Ah@10hr-rate to 1.80V per cell @25°C
Weight	Approx. 48.0 Kg (Tolerance ±3.0%)
Internal Resistance	Approx. 1.9 mΩ
Terminal	F14(M8)/F22(M8)
Max. Discharge Current	3350A (5 sec)
Cold Cranking Ampere(CCA)	870A
Maxi. Charging Current	100.5A
Reference Capacity	C3 259.5AH
	C5 292.5AH
	C10 335.0AH
	C20 356.0AH
Float Charging Voltage	6.8 V~6.9 V @ 25°C Temperature Compensation: -3mV/°C/Cell
Cycle Use Voltage	7.3 V~7.4 V @ 25°C Temperature Compensation: -4mV/°C/Cell
Operating Temperature Range	Discharge: -20°C~60°C
	Charge: 0°C~50°C
	Storage: -20°C~60°C
Normal Operating Temperature Range	25°C ±5°C
Self Discharge	Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charged batteries before using.
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.



series is specially designed for frequent discharge deep cycle application. By using the specially designed active material, strong grids and thick plate construction, the EV series battery offers reliable performance in high load situations and could provide competitive cycle performance. It is suitable for Electric Vehicle and Golf cart, Floor Machines, Forklifts, Aerial lifts, Robotics, Marine, RV, Mobility and Medical Equipment, and most outdoor application.



ISO 9001



ISO 14001



OHSAS 18001




MH 28539



G4M20206-0910-E-16

Dimensions

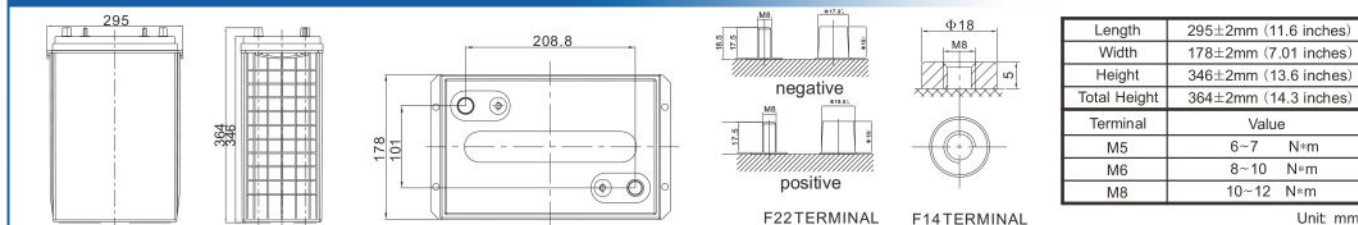

Constant Current Discharge Characteristics : A(25°C)

F.V/Time	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	355.5	206.7	122.1	94.6	74.3	63.3	42.5	35.3	18.5
1.65V	341.3	199.6	118.2	91.7	72.3	61.6	42.0	34.9	18.2
1.70V	326.2	193.1	114.3	89.2	70.4	60.0	41.4	34.4	18.0
1.75V	311.8	186.1	110.3	86.5	68.6	58.5	40.8	33.9	17.8
1.80V	298.0	179.0	106.3	83.8	66.6	57.0	40.1	33.5	17.6
1.85V	256.7	160.5	97.4	77.5	61.9	53.2	37.7	31.5	16.7

Constant Power Discharge Characteristics : WPC(25°C)


F.V/Time	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	645.7	388.5	231.4	180.6	142.7	121.9	83.0	69.5	36.4
1.65V	626.4	377.3	225.1	175.8	139.4	119.2	82.3	68.7	35.9
1.70V	604.7	367.3	218.8	171.8	136.1	116.5	81.2	67.8	35.5
1.75V	583.9	356.0	212.2	167.4	133.1	114.0	80.2	67.0	35.1
1.80V	563.7	344.4	205.6	162.8	129.8	111.4	79.0	66.2	34.8
1.85V	490.4	310.8	189.4	151.2	121.1	104.3	74.4	62.4	33.1

(Note) The above characteristics data are average values obtained within three charge/discharge cycle not the minimum values.


The battery must be fully charged before the capacity test. The C₁₀ should reach 95% after the first cycle and 100% after the third cycle.

If F22 terminal is selected and the discharge current is more than 0.25C, the threaded terminal of terminal F22 shall not be used in connection, but the lead pole shall be connected.


Charge Characteristic Curve for Cycle Use(IUUU)

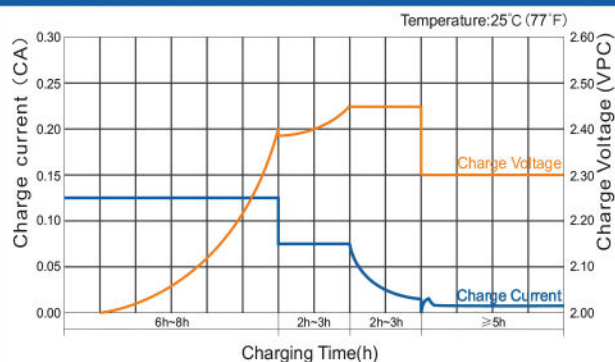


Charge Characteristic Curve For Cycle Use(IIUI)

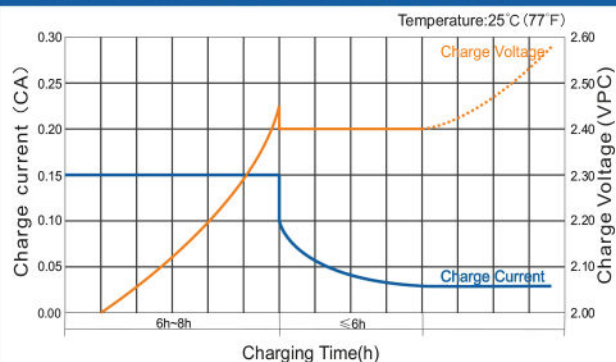


Cycle Life in Relation to Depth of Discharge

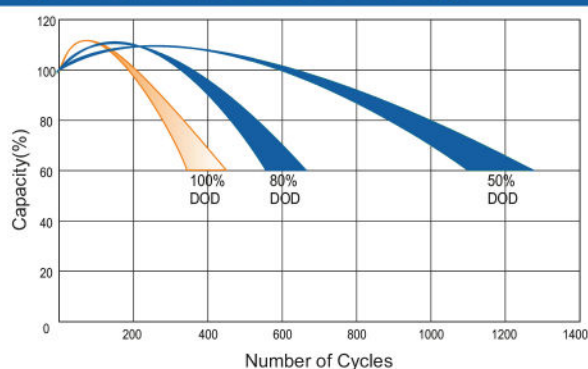


Storage Characteristics

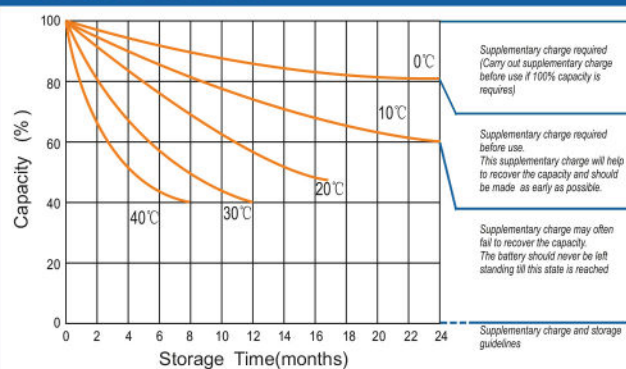


Discharge Characteristics Curve

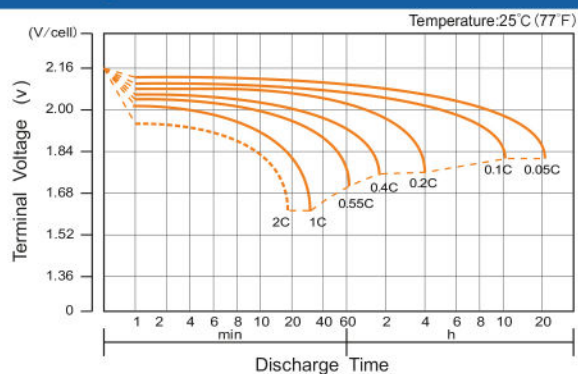

Relationship Between Charging Voltage and Temperature

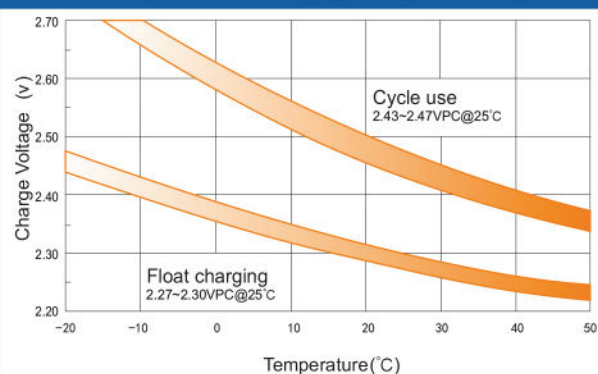

Relationship of OCV And State of Charge(20°C)

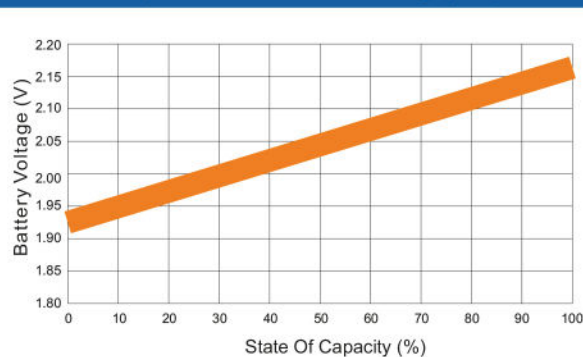

Temperature Effects on Capacity

